

# ЭРИС



**710**



**711**

По вопросам продаж и поддержки обращайтесь:

Тел./факс: +7(843)206-01-48 (факс доб.0)

[esr@nt-rt.ru](mailto:esr@nt-rt.ru)

[www.eris.nt-rt.ru](http://www.eris.nt-rt.ru)

- 1.
- 2.
- 3.
- 4.
- 5. 710 711 TR 7
- 6. 710 711 PV
- 7.
- 8.
- 9. ,
- 10.
- 11. TR PV
- 12. TR
- 13.



711 HART® - ,

7

7

-

7

Brix-

(PTB-Zulassung)



DIMF

/

7

710 -


711 -

TR


TR

PV,


CSM.

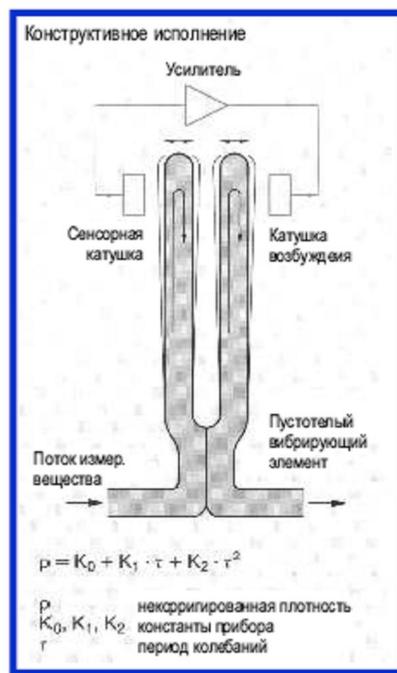

710

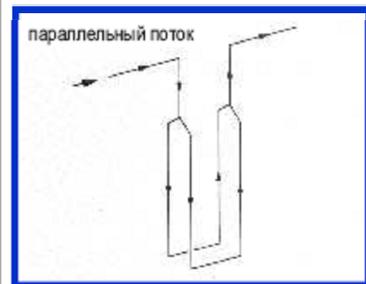

711

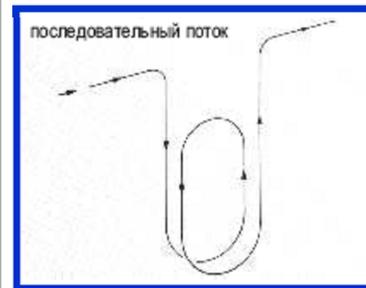

7  
7  
7


711 (CIP- SIP- ).

1.4571;

710

TR

710 ... HART. 711 ...  
SensorPort, PACTware AMS.

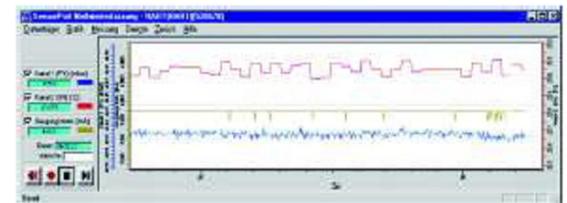

SensorPort: регистрация измеряемых данных


SensorPort

PACTware



DTM-

FDT 1.2.

7

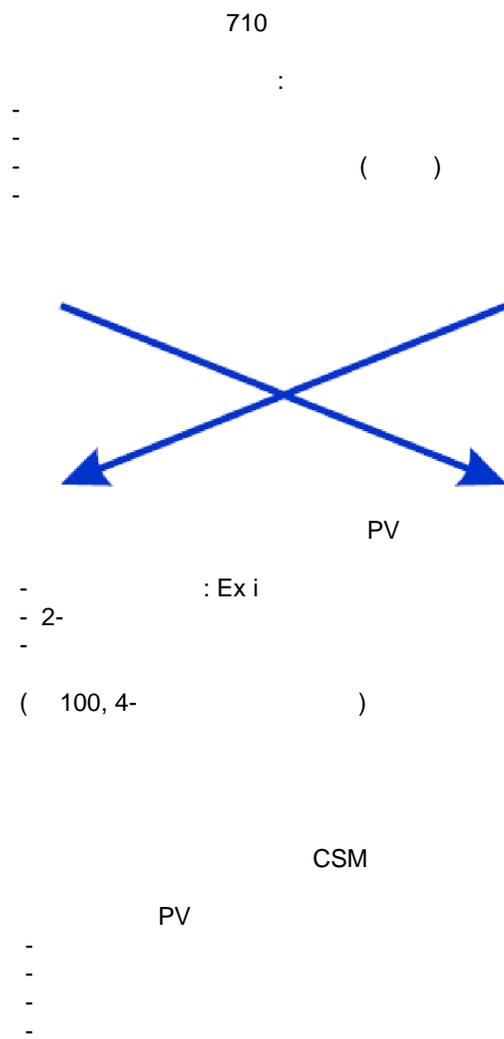

711

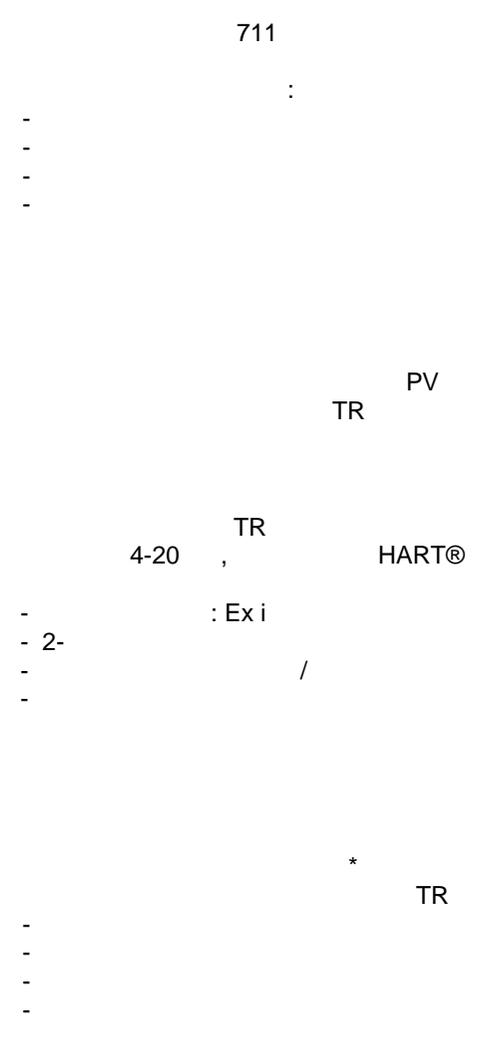

710

711

TR

- 
- 2-
- 4-20 , HART
- 4-
- 
- (SensorPort, PACTware, AMS)
- HandHeldTerminal HHT 275
- DTM-
- °Brix, Be, °API
- 
- ( 400 )
- 
- ( DTM-
- 
- : ZELM 99 0008 X,
- : II 1/2 ia IIC T4,
- : II 2G EEx ia IIC T4,

HART

HART

FDT 1.2  
kg/m<sup>3</sup>, Mass%, Vol%,

DTM-



710 ...




711 ...





710

7

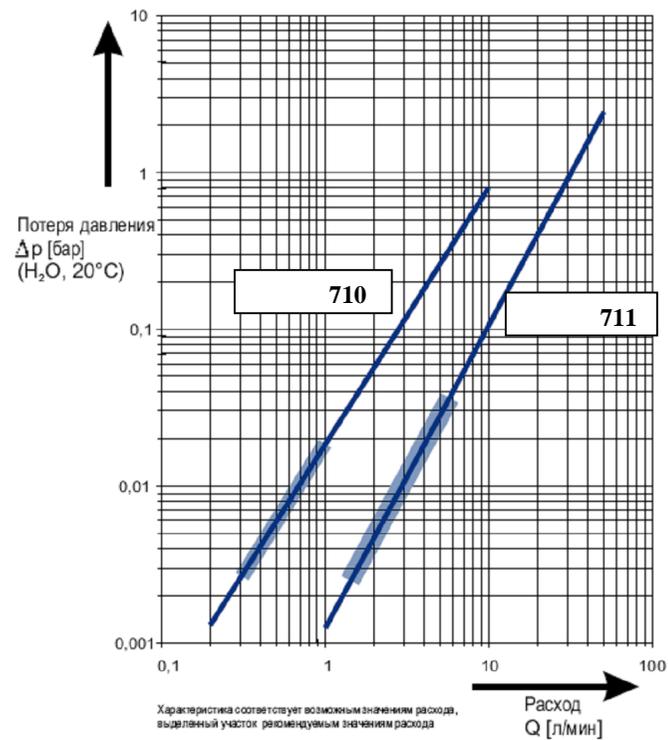

710: 0.5 / ; 711: 2.0 / .

	710	711
:	0 5000 / 3 400 2000 / 3 450 2000 / 3	0 5000 / 3 400 2000 / 3
-	< ± 0,1 / 3	< ± 0,2 / 3
-	< ± 0,02 / 3	< ± 0,05 / 3
	-40°C + 150°C -40°C + 100°C 710PKS	-40°C + 150°C, : -40°C + 210°C
	PV: Pt 100 CSM, TR: Pt 1000	PV: Pt 100 TR: Pt 1000 CSM,
	< 0,02 / 3/ 100	< 0,02 / 3/ 100
	0 10 / 0,3 1 /	0 50 / 1,5 6 /
:	NiFeCr 1.4571	1.4571 1.4306, 400, 600, 4 2,
-	1.4571	1.4571
	2 5	10
	(DIN EN 10204-2.2)	(DIN EN 10204)
		4,2
	- G 1/4" ISO 228 - DN 10 PN40 1/2"/ANSI 150/300 RF	- Swagelok 12 - DN 10 PN 40 1/2"/ANSI 150/300 RF - DIN 11851 PN 10 - DIN 405 PN 16 - TRI-Clamp -

	711	710
	PV	
	1:1, 800 1400	
	24 VDC ( .15 VDC / .30 VDC)	
	2- 20 1.5/ g 13,5.	
	4- ( Pt 100 , 20 1.5/ g 13,5	
	-	
	- 45 °C +85 °C - 45 °C +85 °C	
	DTM 00 ATEX E 092 X II 2G EEx ib IICT6/5	
	IP 65	
	60 125 80	
	0,6	




710P...


	710 711 4 HART® (SensorPort, PACTware)
	: 5 / 3), (
	4-20 HART®, °Brix, °Plato
	24 VDC ( . 15 VDC / . 30 VDC)
	2- 20 1.5 / g 13,5, 1/2" NPT ( Conduit)
	- 40 °C + 70 °C - 10 °C + 58 °C - 40 °C + 70 °C ( )
	ZELM99ATEX0008X II 1/2 G EEx ia IIC T4 1/2 G 0 ZELM99ATEX0008X II 2 G EEx ia IIC T4 2 G Exd ( )-
	IP 67
	100 155 120
	1,2




711 ...

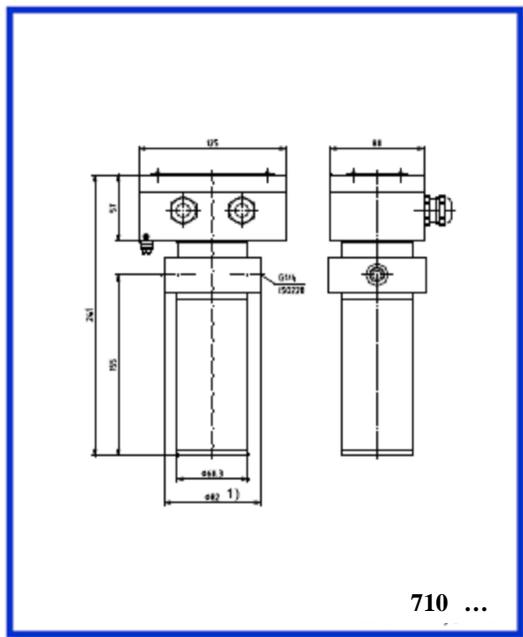


710 ...

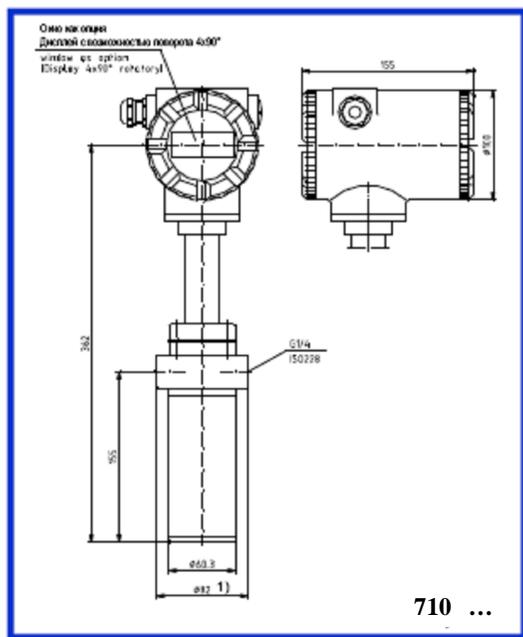

710 ...

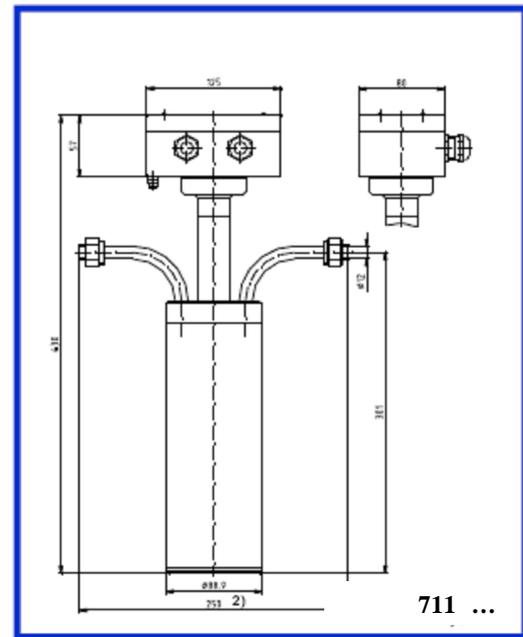

711 ...

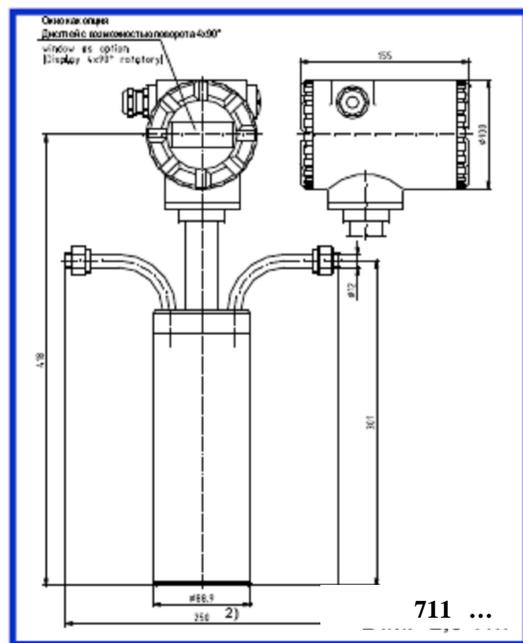

711 ...

- 1) 710, : 200
- 2) 711, : 250

По вопросам продаж и поддержки обращайтесь:

Тел./факс: +7(843)206-01-48 (факс доб.0)

esr@nt-rt.ru

www.eris.nt-rt.ru